

81N

EPSON REFILLABLE CARTRIDGE INSTRUCTIONS



Step 1. Remove silicon plug from tank



Step 2. S-l-o-w-l-y squeeze the appropriate ink into correct tank through the filling hole.




Step 3. Fill no higher than the line indicated here.



Step 4. Replace silicon plug back into the filling hole.



Step 5. Instal refilled tank into printer as normal. Chip / ink levels will automatically reset to full.

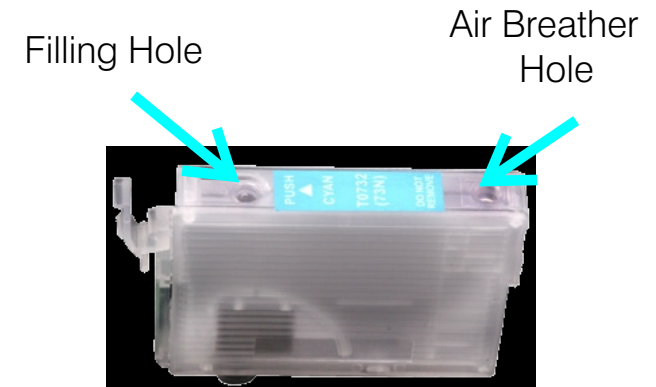

IMPORTANT NOTES:

If you remove a tank before the printer driver indicates empty, top the tank back up to full with ink as the chip will reset to full when reinstalled. **FAILURE TO DO SO WILL RESULT IN DAMAGE TO THE PRINT HEAD.**