


# Instructions

www.easyrefills.com.au

## Canon CLI-526

Kit Code: K91CLR

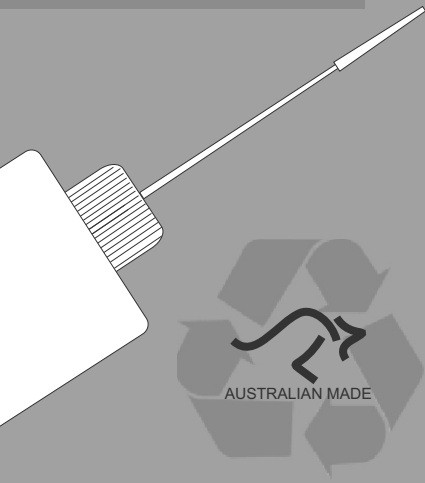

## Easyrefills kit

### Kit Contents:

- 5 x ink bottles (c,m,y,pb & gy)
- 1 x plastic gloves
- 1 x screw drill tool
- 1 x absorbent pad
- 5 x ball plugs


### Preparation:

- Put on the gloves supplied
- Cover your work area in newspaper in case of accidental spillage.
- Read these instructions thoroughly
- Remove the cartridge from your printer (only do this when ready to refill.)

**NB:** Ink stains so we would recommend you wear old clothes or an apron when refilling.



## Preparation

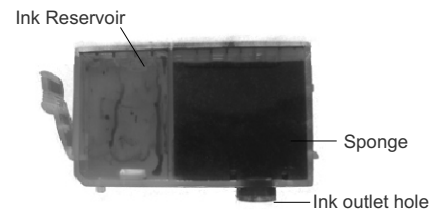

Sit the cartridge in it's original plastic cradle. If you do not have the cradle simply cover the ink outlet hole with a piece of tape. This will prevent ink from leaking while you are refilling the cartridge.




Locate the slight depression under the label in the position indicated above. You can remove the label in this area (as shown) or go through it. Note the ball plug.

## 1 Step One



Push the supplied screw drill tool into the ball plug and twist a couple of times so that the screw drill tool grabs the ball plug. Gently lever the screw drill tool and the ball plug will pop out of it's socket. The ball plug can be reused.

## 2 Step Two

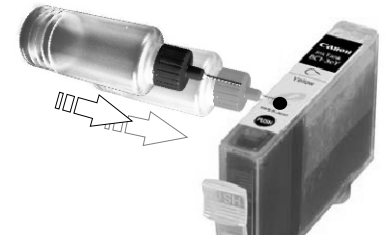

Insert the refill needle into the filling hole. Angle the needle toward the ink outlet hole at the bottom of the cartridge.

## 3 Step Three

## 4 Step Four

### Printer Compatibility:

CANON PIXMA MG 6150, MG 8150

### Cartridge Stats:

Colours: Cyan, Magenta, Yellow, Photo Black & Grey  
Ink Capacity: 9 ml per chamber

### Number of refills per kit:


22 refills per kit

Easyrefills manufactures all refill kits at it's Queensland headquarters. Importing the finest quality American made inks that are in most cases better than or equal to original manufacturers specifications. Each kit has a shelf life of two years and is covered by a 100% guarantee.

Copyright 2010 Easyrefills. All names and numbers used are registered trademarks of their respective owners.

www.easyrefills.com.au

## 5 Step Five

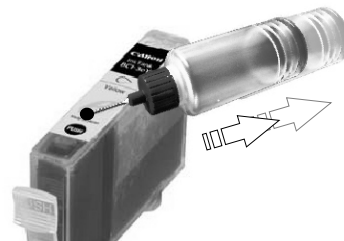


S-l-o-w-l-y and gently squeeze the ink refill bottle to force ink into the reservoir until it is almost full or until a drop of ink comes back out of the fill hole.

## 6 Step Six



Ball plug here

Replace the ball plug so it clicks firmly into place. While you can re-use a ball plug several times, it must create a tight seal. If leaking occurs, check that the ball plug is correctly inserted and not worn out.

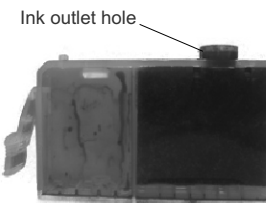

Turn the cartridge upside down and carefully remove the cradle or tape from the ink outlet hole (see step 1). Note: Make sure you have a paper towel handy as ink may have pooled during refilling and could drip.

## 7 Step Seven

### Cartridge Empty Message?

These cartridges have chips on them which tell the computer they are empty based on an estimation. Easyrefills recommends purchasing a chip resetter for use with the CLI-526 cartridges. Chip resetters are available from [easyrefills.com.au](http://easyrefills.com.au) and reprogram the chip back to full again.

**Reset your cartridges BEFORE you refill them, it will be less messy.**

**NOTE: for best results, refill and replace one cartridge at a time.**

## 8 Step Eight



Install the cartridge into your printer and run the head cleaning utility (see printer manual). For best results wait 20 minutes before you resume printing.

## 9

## Trouble shooting

**Phone Support**  
**1300 730 018**

## General Information